

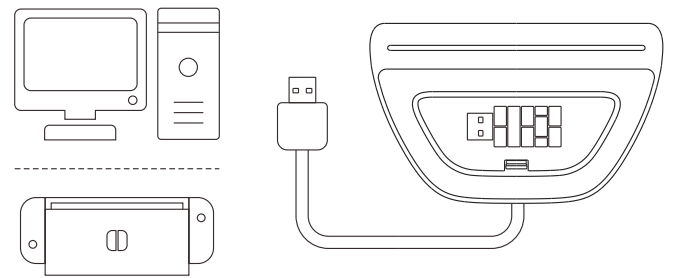


- press **home** button to turn on the controller
- hold **home** button for 3 seconds to turn off the controller
- hold **home** button for 8 seconds to force the controller off
- the controller will turn off when placed on the dock
- plug the 2.4G receiver into the charging dock, then connect it to your Windows device or Switch dock via USB cable for better user experience
- LED lights indicate the player number, 1 LED indicates player 1, 2 LEDs indicate player 2, 4 is the maximum number of players the controller supports for Windows, 8 players for Switch

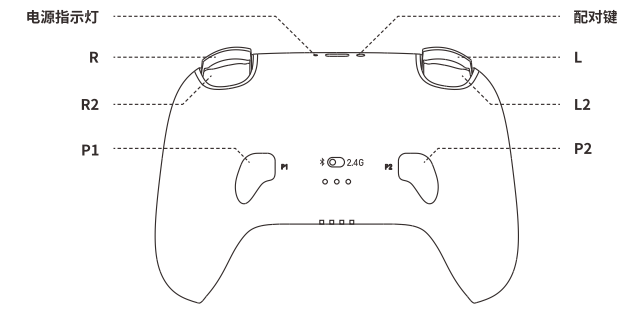

- \* 开机: 按下 home 键。
- \* 关机: 按住 home 键 3 秒。
- \* 强制关机: 按住 home 键 8 秒。
- \* 手柄置于底座时会自动关机。
- \* 可将 2.4G 接收器插入底座的 USB 端口, 并通过 USB 线将底座连接到 Windows 设备或 Switch 主机使用, 以获得更佳的用户体验。
- \* 玩家指示灯支持显示玩家数量, 1 号玩家亮 1 颗指示灯, 以此类推; Windows 设备最多支持显示 4 个玩家, Switch 主机最多支持显示 8 个玩家。

Switch

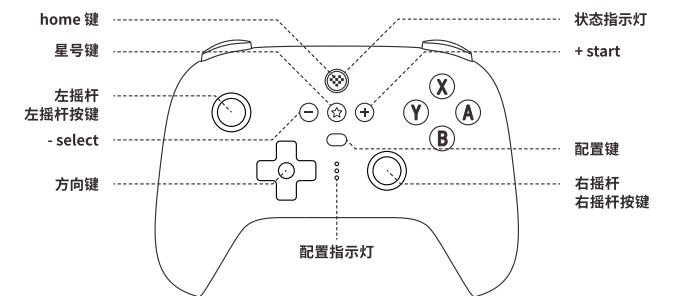

- Switch system needs to be 3.0.0 or above

Bluetooth connection

- 1 – turn the mode switch to Bluetooth
- 2 – press **home** button to turn on the controller
- 3 – hold the **pair** button for 3 seconds to enter its pairing mode, status LED starts to blink rapidly.(this is required for the very first time only)
- 4 – go to your Switch home Page to click on Controllers, then click on Change Grip/Order
- 5 – status LED becomes solid when connection is successful

wireless connection

- OTG cable is required for Switch Lite
- go to System Setting > Controller and Sensors > Turn on [Pro Controller Wired Communication]
- NFC scanning, IR camera, HD rumble, notification LED are not supported
- 1 – connect the 2.4G receiver to the USB port of your Switch dock
- 2 – turn the mode switch to 2.4G
- 3 – press home button to turn on the controller, wait till the controller is successfully recognized by your Switch to play

wired connection

- OTG cable is required for Switch Lite
- go to System Setting > Controller and Sensors > Turn on [Pro Controller Wired Communication]
- NFC scanning, IR camera, HD rumble, notification LED are not supported
- 1 – connect the controller to your Switch dock via its USB cable
- 2 – wait till the controller is successfully recognized by your Switch to play, status LED stays solid

Windows[X-input]



- required system: Windows 10 (1903) or above

wireless connection

- 1 – turn the 2.4G receiver to the USB port of your Window device
- 2 – connect the mode switch to 2.4G
- 3 – press **home** button to turn on the controller, wait till the controller is successfully recognized by your Windows device to play

wired connection

- 1 – connect the controller to your Windows device via its USB cable
- 2 – wait till the controller is successfully recognized by your Windows to play, status LED becomes solid

Turbo function



- status LED blinks continuously when the button with turbo functionality is pressed
- press **star** button to take screenshot when connected to Switch
- **D-pad**, **joysticks** are not included
- hold the button you would like to set turbo functionality to, then press the **star** button to activate/deactivate its turbo functionality

battery



- |                       |   |                     |
|-----------------------|---|---------------------|
| status –              | → | LED indicator –     |
| low battery           | → | red LED blinks      |
| battery charging      | → | red LED stays solid |
| battery fully charged | → | red LED turns off   |

- 22 hours of play time with a 1000mAh built-in battery pack, rechargeable with 2-3 hours charging time
- Charging time with the controller on the dock is the same as charging via USB cable

连接 Switch 主机



- \* 要求 Switch 主机系统版本为 3.0.0 或更高版本。

蓝牙连接

1. 将手柄背后的模式开关移动到 [蓝牙] 位置。
2. 按下 [配对键] 约 3 秒至状态指示灯快速闪烁, 使手柄处于配对状态。(仅首次连接时需要配对)
3. 打开 Switch 主机手柄选项, 选择 [更改握法 / 顺序], 等待手柄与主机自动配对连接。
4. 连接完成后, 状态指示灯常亮显示。

无线连接

- \* Lite 机型需要使用 OTG 转接线。
- \* 请确保 [设置] - [手柄与感应器] - [Pro 手柄的有线连接] 功能已开启。
- \* 不支持 NFC 扫描、红外摄像头、HD 震动、通知灯。
- 1. 将配备的 2.4G 接收器连接到 Switch 主机底座的 USB 端口。
- 2. 将手柄背后的模式开关移动到 [2.4G] 位置。
- 3. 按下 [home] 键 开启手柄, 等待系统识别完成后即可使用。

有线连接

- \* Lite 机型需要使用 OTG 转接线。
- \* 请确保 [设置] - [手柄与感应器] - [Pro 手柄的有线连接] 功能已开启。
- \* 不支持 NFC 扫描、红外摄像头、HD 震动、通知灯。
- \* 将手柄连接到 Switch 主机底座的 USB 端口, 等待系统识别完成后, 状态指示灯常亮。

连接 Windows 设备



- \* 要求 Windows 设备系统版本为 Windows 10 (1903) 或更高版本。

无线连接

1. 将配备的 2.4G 接收器连接到 Windows 设备的 USB 端口。
2. 将手柄背后的模式开关移动到 [2.4G] 位置。
3. 按下 [home] 键 开启手柄, 等待系统识别完成后即可使用。

有线连接

1. 将手柄连接到 Windows 设备的 USB 端口, 等待系统识别完成后, 状态指示灯常亮。

连发功能



- \* 已开启连发功能的按键, 按下时状态指示灯会持续闪烁。
- \* 连接 Switch 时 [星号键] 功能为截图。
- \* [方向键]、[左 / 右摇杆] 不支持连发。
- \* 按需要设置连发的功能键, 再按下 [星号键] 可开启 / 关闭连发。

Ultimate Software

- Press profile switch button to switch between 3 custom profiles. The profile indicator will not light up when using the default setting
- It gives you elite control over every piece of your controller: customize button mapping, adjust stick & trigger sensitivity, vibration control and create macros with any button combination. Please visit support.8bitdo.com for the application

自定义配置

- \* 配置后可按下 [配置键] 切换不同的配置, 默认无配置。
- \* 请访问 app.8bitdo.cn 获取精英软件, 可对手柄按键映射、摇杆灵敏度、扳机键灵敏度、震动强度以及宏等功能进行自定义配置。

Support



- Please visit support.8bitdo.com for further information & additional support



技术支持



- \* 请访问 support.8bitdo.cn 了解详细信息。

