



OPEN FRAME RACKS

SECTION


03

4-POST FLOOR RACKS
Adjustable

2-POST FLOOR RACKS
Aluminum & Steel

WALL MOUNT RACKS
Fixed & Swing-Out

WALL MOUNT BRACKETS
Hinged & Non-Hinged

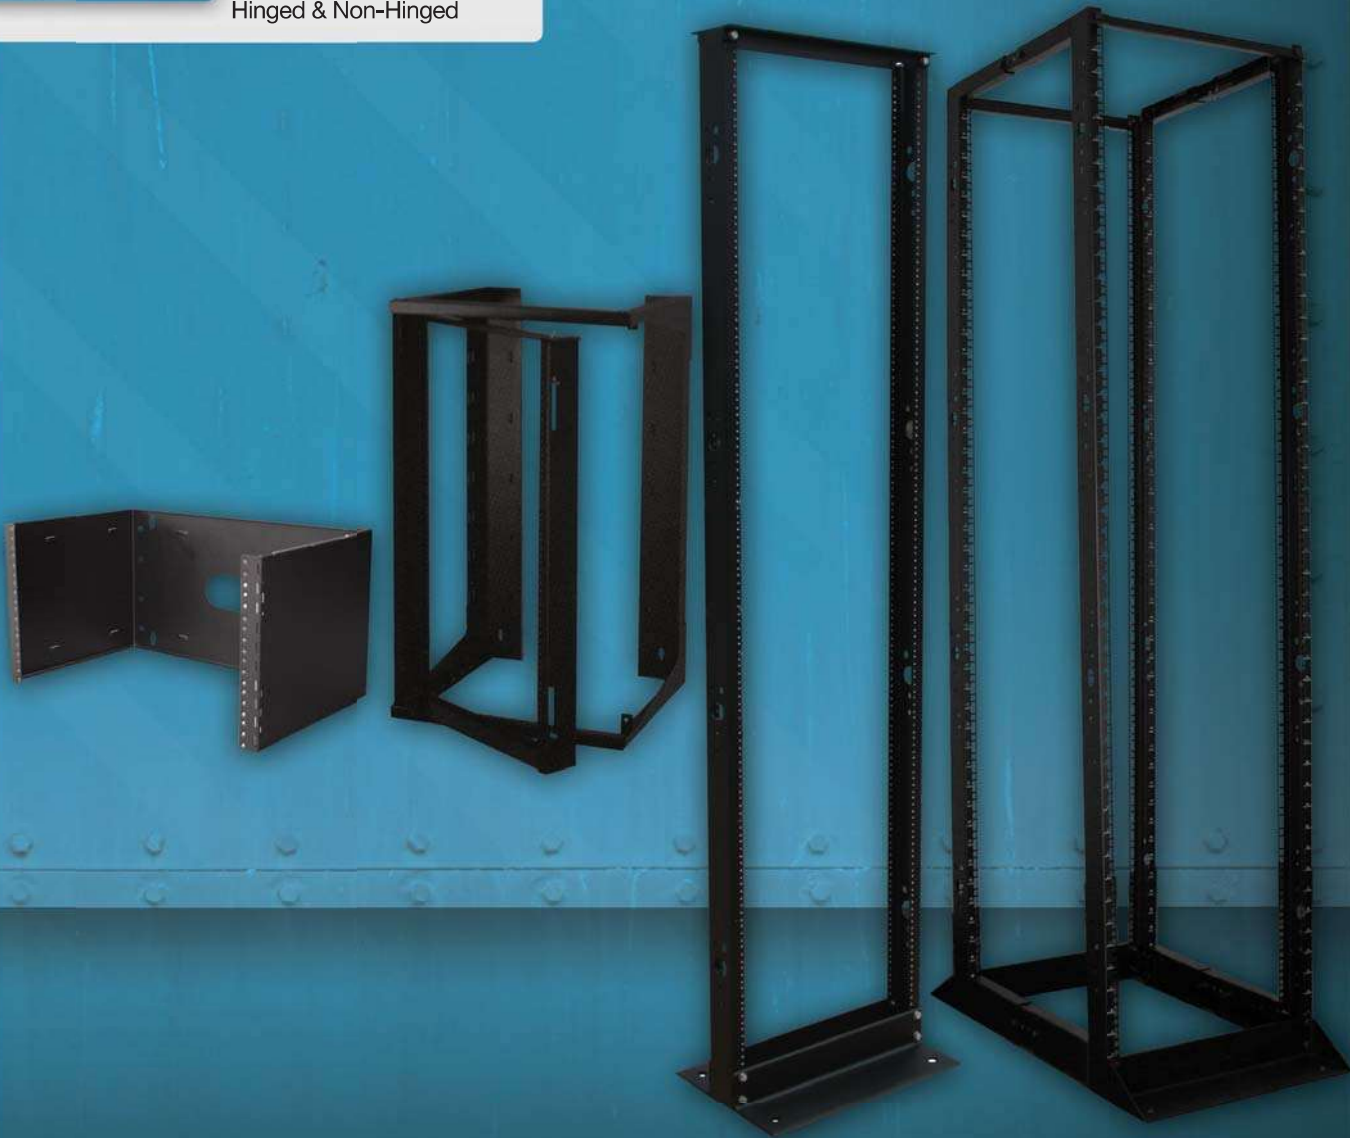



OPEN FRAME RACKS

4PR 4-Post Open Frame Racks **Page No.**

4PR Series Adjustable **37-38**

2PR 2-Post Open Frame Racks **Page No.**

2PR Series Aluminum & Steel **39-40**

WMR Wall Mount Open Frame Racks **Page No.**

WMR Series Fixed & Swing-Out **41**

WMB Wall Mount Brackets **Page No.**

WMB Series Hinged & Non-Hinged **42**

SECTION

03



OPEN FRAME FLOOR RACKS

4-POST


ADJUSTABLE

4PR 4-Post Open Frame Racks

4PR SERIES	4FT.	7FT.
Item No.	FR1924-28-02	FR1924-45-02
Rack Size Height (Rack Units)	54" (28U)	84" (45U)
Rack Size Width	21"	21"
Rack Size Depth	Adjustable 24"-36"	Adjustable 24"-36"
Mounting Format	19"	19"
Load Capacity	1000lbs	1700lbs
Dual Mounting Rails	Cage Nut (#12-24)	Cage Nut (#12-24)
Numbered RU positions	Yes	Yes
Electrostatic Powdercoat MicroFinish	Black	Black
Cage Nuts, Screws & Washers	20 each	40 each
Cable Management D-Rings (Plastic)	16	32
Base Design	Floor Mount	Floor Mount
Compliance	EIA-310D	EIA-310D
Delivery Style	Knockdown	Knockdown

SECTION

03

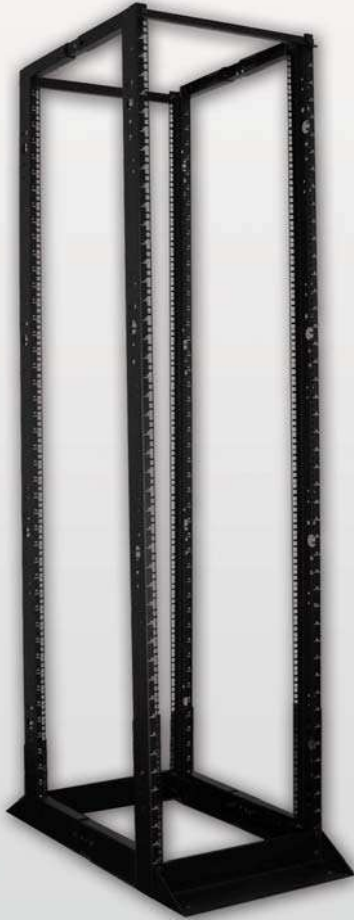

Cable Management
D-Rings Included



4PR Structure and Fabrication

Item No.	Color	Rack Units (U)	Material	Posts	Top Brackets (AWG)	Base (AWG)
FR1924-28-02	Black	28U	Cold Rolled Steel	4	14	10
FR1924-45-02	Black	45U	Cold Rolled Steel	4	14	10

OPEN FRAME FLOOR RACKS

4-POST

ADJUSTABLE



4PR 4-Post Open Frame Racks

Item No.	Rack Units (1U=1.75") 19" Format	External Dimensions (inch)			Internal Dimensions (inch)			Load Capacity (lbs.)	Shipping Weight (Assembled)	Shipping Weight (Knockdown)
		H	W	D	H	W	D			
FR1924-28-02	28U	54"	21"	14"	49"	19"	3"	900	N/A	53
FR1924-45-02	45U	84"	21"	14"	79"	19"	3"	1700	N/A	66

SECTION

03

4PR Adjustable Depth



Pre-drilled adjustable depths are:
24", 26.5", 29", 31.5", 34", 36".

4PR Floor Mount Holes



Constructed with mounting holes for
mounting securely to floor.

4PR Dual-Sided Rails



"U" shaped cage nut rail design to allow
front and rear mounting of equipment.

4PR Angled Top Braces



Reinforced angled top brace supports
provide added load strength.

4PR Rack Unit Numbered Rails



Numbered rack units makes it easier to
configure.



Adjustable Depths
24", 26.5", 29", 31.5", 34", 36"



OPEN FRAME FLOOR RACKS

2-POST

ALUMINUM & STEEL

2PR 2-Post Open Frame Racks

2-POST ALUMINUM FRAME

	3FT.	4FT.	7FT.
Item No.	FR1903-20-02	FR1904-28-02 (Black) FR1904-28-03 (Silver)	FR1907-45-02 (Black) FR1907-45-03 (Silver)
Rack Size Height (Rack Units)	40" (20U)	54" (28U)	84" (45U)
Rack Size Width	21"	21"	21"
Rack Size Depth	14"	14"	14"
Mounting Format	19"	19"	19"
Load Capacity	400lbs	500lbs	1000lbs
Dual Mounting Rails	Tapped (#12-24)	Tapped (#12-24)	Tapped (#12-24)
Numbered RU positions	Yes	Yes	Yes
Electrostatic Powdercoat MicroFinish	Black	Black (-02 Only)	Black (-02 Only)
Screws & Washers	12 each	20 each	40 each
Base Design	Floor Mount	Floor Mount	Floor Mount
Compliance	EIA-310D	EIA-310D	EIA-310D
Delivery Style	Knockdown	Knockdown	Knockdown

2-POST STEEL FRAME

	7FT.	7FT.
Item No.	FR1907-45-02SC	FR1907-45-02S
Rack Size Height (Rack Units)	88" (45U)	84" (45U)
Rack Size Width	24"	21"
Rack Size Depth	24"	22.5"
Mounting Format	19"	19"
Load Capacity	1000lbs	1000lbs
Dual Mounting Rails	Cage Nut (#12-24)	Cage Nut (#12-24)
Numbered RU positions	Yes	Yes
Electrostatic Powdercoat MicroFinish	Black	Black
Cage Nuts, Screws & Washers	28 each	28 each
Base Design	Casters	Floor Mount
Compliance	EIA-310D	EIA-310D
Delivery Style	Knockdown	Knockdown



SECTION

03

2PR Structure and Fabrication

Item No.	Color	Rack Units (U)	Material	Posts	Side Rails (AWG)	Top Brackets (AWG)	Base (AWG)
2-POST ALUMINUM FRAME							
FR1903-20-02	Black	20U	6063 T6 Aluminum	2	5	5	2
FR1904-28-02	Black	28U	6063 T6 Aluminum	2	5	5	2
FR1904-28-03	Silver	28U	6063 T6 Aluminum	2	5	5	2
FR1907-45-02	Black	45U	6063 T6 Aluminum	2	5	5	2
FR1907-45-03	Silver	45U	6063 T6 Aluminum	2	5	5	2
2-POST STEEL FRAME							
FR1907-45-02S	Black	45U	Cold Rolled Steel	2	13	13	9
FR1907-45-02SC	Black	45U	Cold Rolled Steel	2	13	13	13

OPEN FRAME FLOOR RACKS

2-POST

ALUMINUM & STEEL



2PR 2-Post Open Frame Racks

Item No.	Rack Units (1U=1.75") 19" Format	External Dimensions (inch)			Internal Dimensions (inch)			Load Capacity (lbs.)	Shipping Weight (Assembled)	Shipping Weight (Knockdown)
		H	W	D	H	W	D			
FR1903-20-02	20U	40"	21"	14"	35"	19"	3"	400	N/A	18
FR1904-28-02	28U	54"	21"	14"	49"	19"	3"	500	N/A	21
FR1904-28-03	28U	54"	21"	14"	49"	19"	3"	500	N/A	21
FR1907-45-02	45U	84"	21"	14"	79"	19"	3"	800	N/A	27
FR1907-45-03	45U	84"	21"	14"	79"	19"	3"	800	N/A	27
FR1907-45-02S	45U	84"	21"	14"	79"	19"	3"	800	N/A	37
FR1907-45-02SC	45U	88"	24"	24"	79"	19"	3"	800	N/A	64

SECTION

03

2PR Floor Mount Holes



Standard racks are available with floor mount holes for mounting securely to floor.

2PR Locking Casters



Available in a caster version with locking casters for flexibility in relocation of the rack.

2PR Dual-Sided Rails



"U" shaped cage nut rail design to allow front and rear mounting of equipment.

2PR Reinforced Angled Top Braces



Reinforced angled top brace supports provide added load strength.

2PR Rack Unit Numbered Rails



Numbered rack units makes it easier to configure.

NEW





WALL MOUNT RACKS

2-POST

FIXED & SWING-OUT

NEW SIZES

WMR Open Frame Wall Mount Rack

	Fixed	Swing-Out
Rack Size Height (Rack Units)	23" (13U) 28" (16U) 35" (20U)	39in (20U) 48in (25U)
Rack Size Width	21"	21"
Rack Size Depth	12"	18" or 24"
Mounting Format	19"	19"
Hinged Swing Out Design	No	Yes
Dual Tapped Rails	Yes (#12-24)	Yes (#12-24)
Numbered RU positions	No	No
Electrostatic Powdercoat MicroFinish	Black	Black
Screws & Washers (#12-24)	16 each	20 each
Compliance	EIA-310D	EIA-310D
Delivery Style	Knockdown	Knockdown

NEW

SECTION

03



WMR Structure and Fabrication

Item No.	Style	Color	Rack Units (U)	Material	Posts	Side Rails (AWG)	Top Brackets (AWG)	Base (AWG)
WR1922-13-02	Fixed	Black	13U	T6063 Aluminum	2	5	13	13
WR1928-16-02	Fixed	Black	16U	T6063 Aluminum	2	5	13	13
WR1928-20-02	Fixed	Black	20U	T6063 Aluminum	2	5	13	13
SR1935-20-02	Swing-Out	Black	20U	T6063 Aluminum	2	9	13	13
SR1935-20-02D	Swing-Out	Black	20U	T6063 Aluminum	2	9	13	13
SR1943-25-02	Swing-Out	Black	25U	T6063 Aluminum	2	9	13	13
SR1943-25-02D	Swing-Out	Black	25U	T6063 Aluminum	2	9	13	13

WMR Open Frame Wall Mount Rack Series

Item No.	Rack Units (1U=1.75") 19" Format	External Dimensions (inch)			Internal Dimensions (inch)			Load Capacity (lbs.)	Shipping Weight (Assembled)	Shipping Weight (Knockdown)
		H	W	D	H	W	D			
WR1922-13-02	13U	23"	21"	12"	19.5"	19"	3"	150	N/A	13
WR1928-16-02	16U	28"	21"	12"	24.5"	19"	3"	165	N/A	15
WR1935-20-02	20U	40"	21"	12"	35"	19"	3"	220	N/A	17
SR1935-20-02	20U	40"	21"	18"	35"	19"	3"	80	N/A	46
SR1935-20-02D	20U	40"	21"	24"	35"	19"	3"	80	N/A	46
SR1943-25-02	25U	49"	21"	18"	43.75"	19"	3"	98	N/A	52
SR1943-25-02D	25U	49"	21"	24"	43.75"	19"	3"	98	N/A	52

WMR Swing-Out Design



Available in a Fixed or Swing-Out design for flexibility in accessing the back of the equipment.

WMR Dual-Sided Rails



"U" shaped 12-24 Tapped rail design to allow front and rear mounting of equipment.

WALL MOUNT BRACKETS

2-POST

HINGED & NON-HINGED



WMB Wall Mount Bracket Series

	Hinged	Non-Hinged
Rack Size Height (Rack Units)	1.75" (1U) 3.5" (2U) 5.25" (3U) 7.0" (4U) 10.5" (6U) 12.25" (7U)	3.5" (2U) 5.25" (3U) 7.0" (4U) 10.5" (6U)
Rack Size Width	20"	20"
Rack Size Depth	6" or 12"	6" or 12"
Mounting Format	19"	19"
Hinged Swing Out Design	Yes	No
Dual Tapped Rails	Yes (#12-24)	Yes (#12-24)
Electrostatic Powdercoat MicroFinish	Black	Black
Screws & Washers (#12-24)	4 each	4 each
Compliance	EIA-310D	EIA-310D
Delivery Style	Assembled	Assembled



SECTION
03

WMB Structure and Fabrication

Non-Hinged	Hinged	Color	Rack Units	Material	Side Rails	Rear Plate
- - -	WB19-0106H	Black	1U	Cold Rolled Steel	15	15
WB19-0206N	WB19-0206H	Black	2U	Cold Rolled Steel	15	15
WB19-0306N	WB19-0306H	Black	3U	Cold Rolled Steel	15	15
WB19-0406N	WB19-0406H	Black	4U	Cold Rolled Steel	15	15
WB19-0606N	WB19-0606H	Black	6U	Cold Rolled Steel	15	15
WB19-0412N	WB19-0412H	Black	4U	Cold Rolled Steel	15	15
WB19-0612N	WB19-0612H	Black	6U	Cold Rolled Steel	15	15
WB19-0712N	- - -	Black	7U	Cold Rolled Steel	15	15

WMB Wall Mount Bracket Series

Item No.		Rack Units (1U=1.75") 19" Format	External Dimensions (inch)			Internal Dimensions (inch)			Load Capacity (lbs.)	Shipping Weight (Assembled)
Non-Hinged	Hinged		H	W	D	H	W	D		
- - -	WB19-0106H	1U	1.75"	21"	6"	1.75"	19"	6"	10	2
WB19-0206N	WB19-0206H	2U	3.0"	21"	6"	3.0"	19"	6"	15	3
WB19-0306N	WB19-0306H	3U	5.25"	21"	6"	5.25"	19"	6"	20	4
WB19-0406N	WB19-0406H	4U	7.0"	21"	6"	7.0"	19"	6"	25	5
WB19-0606N	WB19-0606H	6U	10.5"	21"	6"	10.5"	19"	6"	35	6
WB19-0412N	WB19-0412H	4U	7.0"	21"	12"	7.0"	19"	12"	30	7
WB19-0612N	WB19-0612H	6U	10.5"	21"	12"	10.5"	19"	12"	40	10
WB19-0712N	- - -	7U	12.25"	21"	12"	12.25"	19"	12"	45	11

WMB Hinged Design



Available in a Fixed or Swing-Out design for flexibility in accessing the back of the equipment.

WMB Extended Depth



"U" shaped #12-24 Tapped rail design to available in 6" or 12" depths for mounting deeper equipment.