



Doorbells &gt; PoE Smart Chime



## PoE Smart Chime

UACC-Chime-PoE

[Datasheet](#)[In The Box](#)[Marketing Images](#)[Installation Guide](#)

### Mechanical

#### Dimensions

Device:  $\varnothing 62 \times 54 \text{ mm}$  ( $\varnothing 2.5 \times 2.1"$ )  
In-wall mount:  $\varnothing 89 \times 63.1 \text{ mm}$  ( $\varnothing 3.5 \times 2.5"$ )  
On-wall Mount:  $\varnothing 62 \times 20.2 \text{ mm}$  ( $\varnothing 2.5 \times 0.8"$ )

#### Weight

Device: 158 g (5.6 oz)  
In-wall mount: 91 g (3.2 oz)  
On-wall mount: 28 g (1 oz)

#### Enclosure material

Polycarbonate, aluminum alloy

#### Mount material

Polycarbonate, zinc alloy

### System

#### Networking interface

10/100 MbE port

#### Power method

PoE

#### Supported voltage range

44—57V DC

#### Max. power consumption

3W

#### ESD/EMP protection

Air:  $\pm 8 \text{ kV}$ , contact:  $\pm 4 \text{ kV}$

#### LED

R/G/B/W

#### Button

Factory reset

#### Ambient operating temperature

0 to 40° C (32 to 104° F)

#### Ambient operating humidity

10 to 90% noncondensing

#### Certifications

CE, FCC, IC

### Audio

#### Speaker

Yes

#### Buzzer

Yes


### Software

#### Web application

UniFi Protect  
UniFi Access


#### Mobile app

UniFi Protect iOS™ and Android™

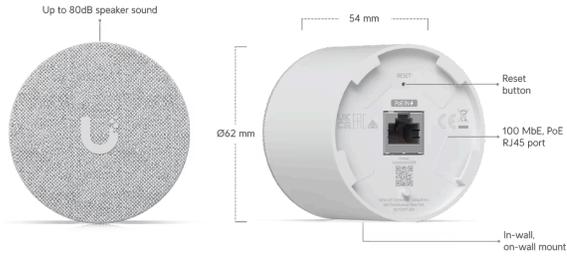

Stay in Touch

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.